

We Make Solar Evolve

EiTe POLY

Polycrystalline Module

ET-P660270WW/WB 270W

ET-P660265WW/WB 265W

ET-P660260WW/WB 260W

ET-P660255WW/WB 255W



High conversion efficiency
High module efficiency to guarantee power output.



Self-cleaning glass
Coating glass for self-cleaning, reduce surface dust.



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.




Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.

0 to +5W

0 to +5W positive tolerance
Detailed information in Electrical Specifications.

48

48-hour response service

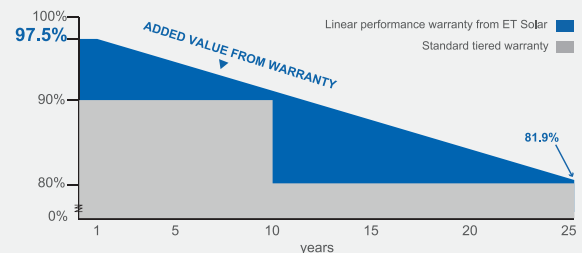

25

25-year performance warranty

10

10-year warranty on materials and workmanship

IEC 61215 Ed.2
IEC 61730
IEC 61701
IEC 62716
UL 1703



CONFORMS TO UL STD. 1703
CERTIFIED TO UL/ORD STD. C. 1703-01



Towards Excellence

M/ET-PD-EN-WW2016V2

www.etsolar.com

ELECTRICAL SPECIFICATIONS

Model Type	ET-P660270WW	ET-P660265WW	ET-P660260WW	ET-P660255WW
	ET-P660270WB	ET-P660265WB	ET-P660260WB	ET-P660255WB
Peak Power (Pmax)	270W	265W	260W	255W
Module Efficiency	16.60%	16.29%	15.98%	15.67%
Maximum Power Voltage (Vmp)	30.97V	30.74V	30.59V	30.29V
Maximum Power Current (Imp)	8.72A	8.62A	8.50A	8.42A
Open Circuit Voltage (Voc)	38.72V	38.29V	38.16V	37.89V
Short Circuit Current (Isc)	9.31A	9.24A	9.07A	9.00A
Power Tolerance	0 to +5W			
Operating Temperature	- 40 ~ + 85°C			
Maximum System Voltage	DC 1000V			
Nominal Operating Cell Temperature	45.3±2°C			
Fire Safety	Class C(IEC) / Type 1(UL)			
Maximum Series Fuse Rating	20A(IEC) / 15A(UL)			

MECHANICAL SPECIFICATIONS

Cell Type	156mm x 156mm
Number of Cells	60 cells in series
Weight	18.5 kg (40.79 lbs)
Dimension	1640×992×35 mm (64.57×39.06×1.38 inch)
Max Load	5400 Pascals (112 lb/ft ²)
Junction Box	IP67 rated
Connector	MC4 Compatible
Output cable	4mm ² (IEC) / 12AWG:PV Wire(UL)

TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.41% /°C

PACKING MANNER

Container	20' GP	40' GP
Pieces per Pallet	29	29
Pieces per Container	348	812


PHYSICAL CHARACTERISTICS

Unit:mm (inch)

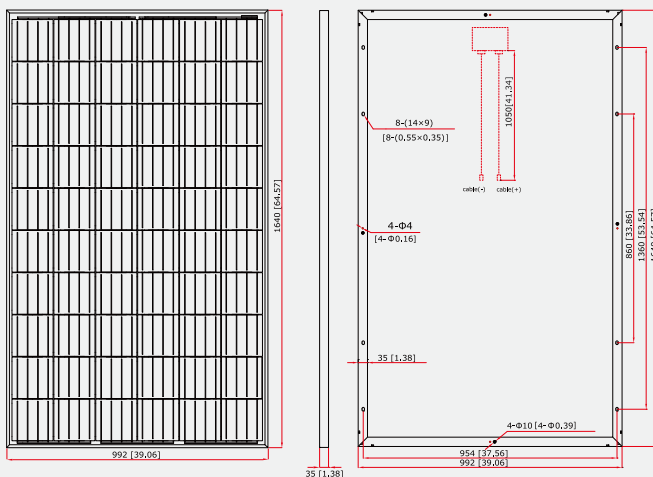


ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (AM1.5, Cell Temperature 25°C)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.